

# SA Performer series

## SA 4827 full range cabinet

### Reinforcement Loudspeaker

### Technical Specifications


#### SA 4827 full range cabinet

The SA 4827 is a compact, high-power full range cabinet capable of producing high sound pressure levels with very low distortion. This is achieved by using the SA 1502 15" low-mid driver and the SA 8526 Compact Driver.

#### Available options:

- Flightcased version;
- Dolly for transportation including castors;
- Tube stand adaptor for Performer series subwoofer cabinets;
- Rigging system.

Each of these options may be ordered separately.

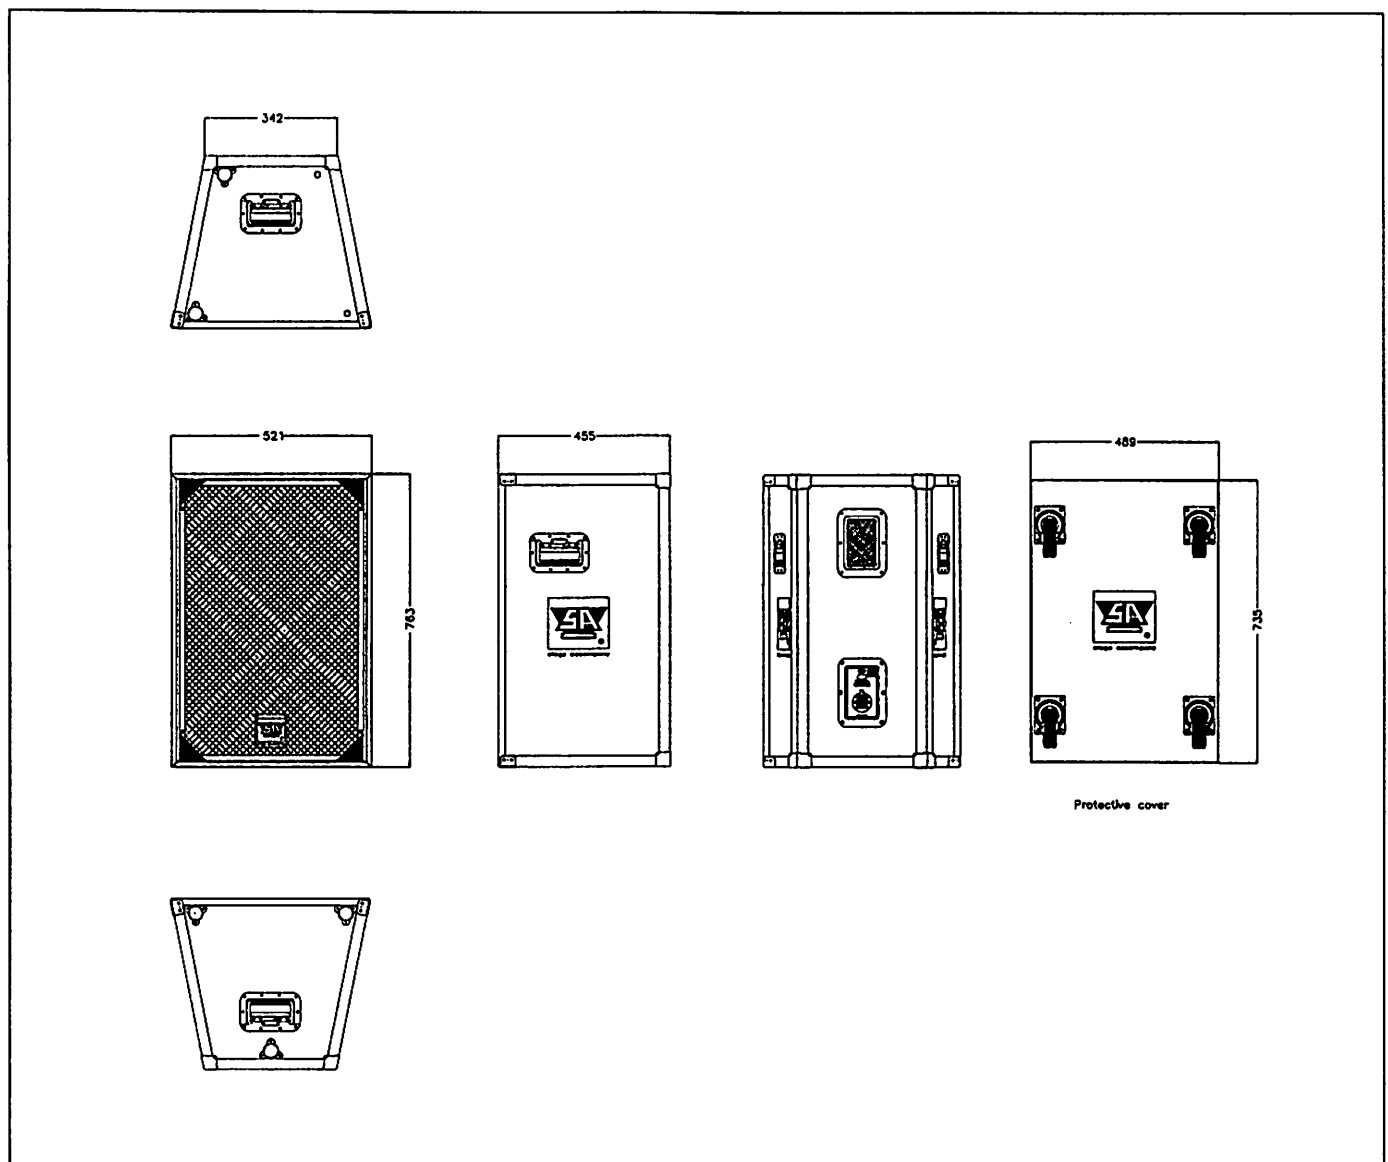

Physical dimensions of the SA 4827; flightcased version. The protective cover/dolly for transportation is shown at the right side.

- High acoustic output
- Compact rugged design
- Equipped with the SA 1502 high efficiency driver and the SA 8526 Compact Driver
- Unequalled transient response
- Road-proof in cased version
- Prepared for use with the SA 4817 subwoofer through position plates (cased version)



stage accompany

# SA Performer series

## SA 4827 full range cabinet


Reinforcement Loudspeaker

Technical Specifications

### Technical specifications

Frequency response:	60 Hz - 32 kHz +/- 3 dB
Driver complement:	One SA 1502 LF driver; One SA 8526 Compact Driver
Nominal impedance:	8 Ohms LF driver 5 Ohms HF driver
Low-mid sensitivity	98 dB, @ 1 W 1 meter
High sensitivity	99 dB, @ 1 W 1 meter
Low-mid max. RMS power:	150 Watts
High max. RMS power:	120 Watts
Low-mid max. peak power:	1000 Watts (200 ms)
High max. peak power:	1000 Watts (200 ms)
Enclosure:	Vented, multi-ply birchwood

Finish:	Blue, other colours on request
Physical overall dimensions:	758 x 516 x 450 mm (hxwxd)
Flightcased version:	763 x 521 x 455 mm (hxwxd)
Including castors:	add 130 mm to depth
Weight:	45 kg + 5 kg for flightware + 6,5 kg for dolly with castors + 5 kg for flyer system
Protective grill:	Expanded metal screen
Connector:	Neutrik 8 pin Speakon
Rigging (optional):	Aircraft snap-lock strips

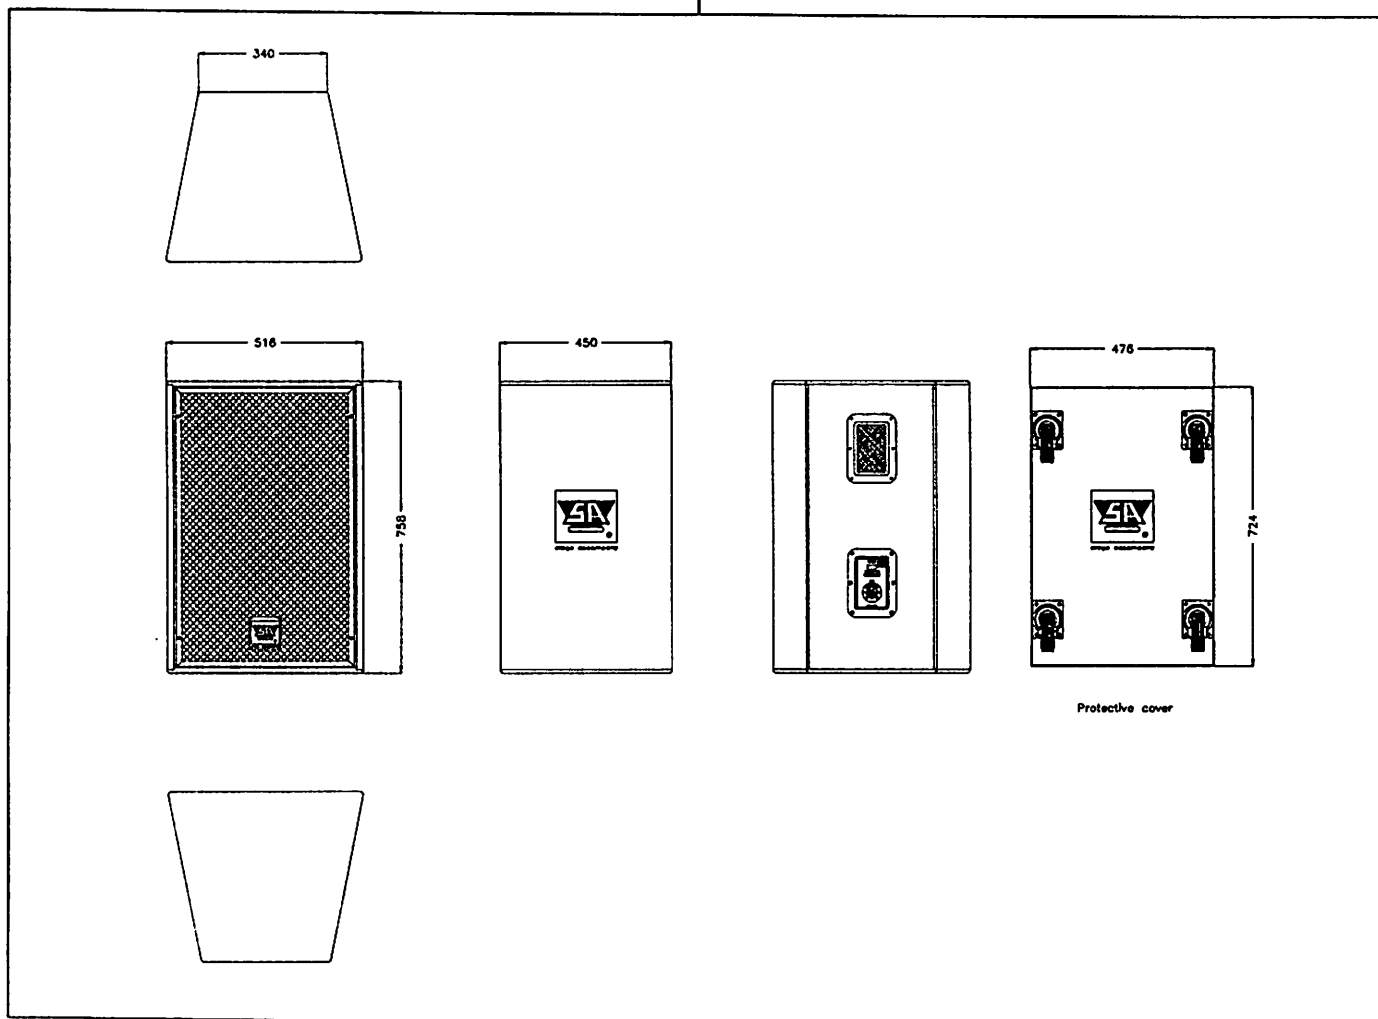

Physical dimensions of the SA 4827; normal version. The protective cover/dolly for transportation is shown at the right side.



stage accompany

Stage Accompany B.V.

Anodeweg 4  
1627 LJ Hoorn  
The Netherlands  
Phone: (0)2290 - 12542  
Fax: (0)2290 - 11192  
Telex: 37989 stage nl